


## Small vacuum feedthrough vacuum feedthrough with integrated RF Filter and M12 connector

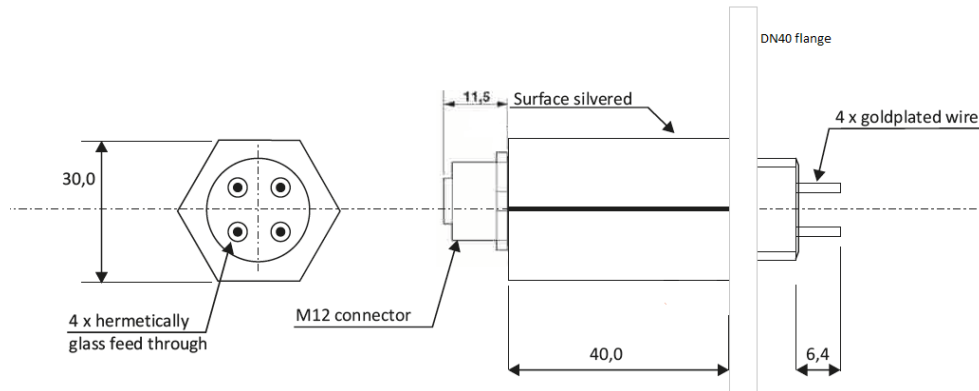

All dimensions in mm. 4 x hermetically - glass feed through – FPM seal leak rate

Leak rate	< 1e-8 hPa l /s
Working voltage	100Vdc
Test voltage	250Vdc 1min.
Feed-through current	max 2A
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance (4 x)	100nF min.
Inductance (4 x)	2,2uH min
Soldering conditions on terminals	max 250 deg C
Atenuation (calculated values)	
0,1MHz	10dB
1MHz	50dB
10 MHz	80dB
100 MHz	80dB

ROHS compliant.



Mounting example

